

## ET5-1300TD

### LOW PROFILE T5 FLUORESCENT EMERGENCY BALLAST 1300 LUMENS

STANDARD



#### ILLUMINATION

- Works with or without an AC ballast to convert new or existing fluorescent fixtures in to unobtrusive emergency lighting
- Operates one lamp in the emergency mode for a minimum of 90-minutes
- Provides a maximum initial lumen output of 1300 lumens

#### ELECTRICAL

- Dual 120-277V
- Charge/Power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- 8.4V long life, maintenance-free, rechargeable sealed NiCd battery
- Internal solid-state transfer switch automatically connects the internal battery to fluorescent lamp for minimum 90-minute emergency illumination
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours
- Time delay enhancement to overcome end-of-life circuit protection

#### MOUNTING

- Suitable for installation inside, on top or in remote\* of the fixture
- Can be used in both switched and unswitched fixtures
- UL Listed for factory or field installation

#### HOUSING

- Low profile galvanized steel construction
- Compact design fits most fluorescent fixtures

#### LAMP COMPATIBILITY CHART

LAMP TYPE	WATTS	INITIAL LUMENS	
		1-Lamp	2-Lamp
T5	14	750	800
T5	21	850	950
T5	28	1100	n/a
T5	35	1250	n/a
T5HO	24	800	n/a
T5HO	39	1200	n/a
T5HO	54	1300	n/a
T8	17	950	1050
T8	25	1000	1100
T8	28	1050	1100
T8	32	1150	n/a
T8	40	1200	n/a
T12	20	850	n/a
T12	30	975	n/a
T12	34	1050	n/a
T12	40	1200	n/a


LAMP TYPE	WATTS	INITIAL LUMENS	
		1-Lamp	2-Lamp
CFL 2G11	36	1025	n/a
CFL 2G11	40	1050	n/a
CFL 2G11	50	1100	n/a
CFL 2G11	55	1150	n/a
CFL GR10q-4	28	775	850
CFL GR10q-4	38	900	n/a
Circular T9	20	600	675
Circular T9	32	750	n/a
Circular T9	40	850	n/a
Circular T5	22	975	n/a
Circular T5	40	1050	n/a
Circular T5	55	1200	n/a
U-bend T8	29	725	n/a
U-bend T8	32	775	n/a
U-bend T12	34	675	n/a
U-bend T12	40	700	n/a

#### LISTINGS AND WARRANTIES

- Five year warranty against defects in material and workmanship (lamps excluded)
- Meets UL924, NF PA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- UL Listed for damp locations (0°C – 50°C)
- Suitable for use in sealed and gasketed fixtures

#### LAMP COMPATIBILITY

- Compatible with most one-, two-, three-, and four-lamp electronic, standard and dimming AC ballasts
- Operates one T5, T5HO, T8, T12, Circular T5/T9, U-bend T8/T12 and 4-Pin long CFL lamp in emergency mode. Refer to the chart on the next page for a complete list of compatible lamps

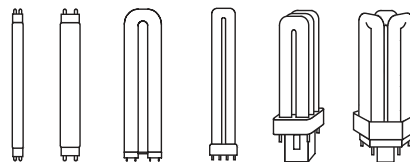

\* When battery packs are remote mounted, the remote distance cannot exceed 1/2 of the distance from ballast to lamp specified by the A.C. ballast manufacturer. The maximum allowable remote mounting distance is 50 feet.

NOTE: In 2-lamp operation, lumens are equally split between the two lamps.