

ENYKXTEU

New York City Compliant Diecast Aluminum Exit Sign

STANDARD



OPTIONAL



ILLUMINATION

- Ultra bright, energy efficient, long life red LEDs.
- New York City compliant 8" EXIT letters.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Aluminum mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

HOUSING

- Premium-grade, aluminum housing (also available in optional black or white powder-coated finishes).
- Field selectable knockout Chevron directional indicators. Unique design allows double face conversion in the field.
- Quick-snap face plate closure.

ELECTRICAL INFORMATION

| CATALOG NUMBER | INPUT WATTS (W) | | INPUT AMPS (A) | |
|----------------|-----------------|------|----------------|-------|
| | 120V | 277V | 120V | 277V |
| ENYKXTEU | 5.0 | 5.0 | 0.041 | 0.018 |


OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.
- 2C: Dual circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.

DIMENSIONS

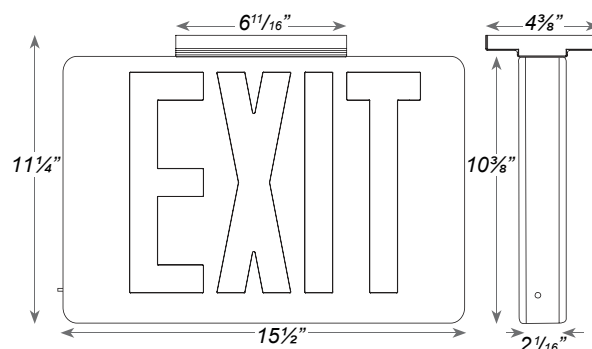

ORDERING INFORMATION

| MODEL | HOUSING COLOR | | FACE PANEL | | BATTERY | | OPTIONS | |
|---|---------------|----------|------------|----------|---------|----------------|---------|------------------------|
| ENYKXTEU1R <i>(Single Face)</i> | W | White | W | White | (blank) | AC-Only | SDT | Self-Diagnostics |
| ENYKXTEU2R <i>(Double Face)</i> | B | Black | B | Black | EM | Battery Backup | 2C | Dual Circuit Operation |
| ENYKXTEU3R <i>(Universal Single/Double face)</i> | A | Aluminum | A | Aluminum | | | | |