

ETH-TTR

LED Tunable Slim Troffer

The PLUS Series - LED Tunable Slim Troffer, Select (3-Wattages + 3-CCT), 130 lm/W, Dimmable + Smart Ready

FEATURES

Lumen Output	3900 to 6500 lumens
Efficacy	130 lm/W
Input Voltage	120-277V
Dimmable	0-10V Continuous
Size	2x2, 2x4
CCT	Select (3500K, 4000K, 5000K)
Warranty	5 Years

APPLICATIONS

Premium indoor luminaire suitable for general indoor commercial spaces, lobbies, offices, meeting rooms, schools, retail stores, restrooms, hallways, and work-stations.

CONSTRUCTION

Manufactured for durability using aluminum sheet housing with satin coating to resist corrosion, discoloration, and scratching. Suitable for Dry and Damp Locations.

ELECTRICAL

Input voltage 120-277V models with 0-10V Continuous Dimming. Tunable 3-CCT (3500K, 4000K, 5000K) and Tunable 3-Wattage. Operating temperatures -4°F to 122°F (-20°C to 50°C).

MOUNTING

Recessed T-Bar Ceiling Mount.

OPTICS

Anti-UV Frosted Polycarbonate Lens.

CONTROLS

Fixture integrated Smart Sensor for Daylight and Bi-Level Motion Dimming available.

EMERGENCY

90 Minute Emergency Backup Battery LED Driver available.

LISTINGS

DLC Premium listed. ETL certified to meet US and Canadian standards. FCC and RoHS compliant.

WARRANTY


5 year exclusive limited warranty.

2x2 and 2x4 Models



TUNABLE CORRELATED COLOR TEMPERATURES (CCT)


3500K



4000K



5000K



SPECIFICATIONS

ENERGY DATA

Input Voltage: 120-277V
Input Frequency: 50/60 Hz
Wattage: Select (30W 35W, 40W), (30W, 40W, 50W)
Power Factor: >0.9
Total Harmonic Distortion (THD): <15%
Operating Temperature: -4°F to 122°F (-20°C to 50°C)

LIGHTING DATA

Lumens: Select (3900, 4550, 5200), (3900, 5200, 6500)
Lumens Per Watt: 130 lm/W
Color Correlated Temperature (CCT): Select (3500K, 4000K, 5000K)
Dimmable: 0-10V
Color Rendering Index (CRI): >80
L70: 50000 hours

ORDERING INFORMATION

Model	Size	Wattage	Voltage	Current	Lumens	Efficacy	CCT	Dimming	Color	Dimensions	Weight
ETH-TTR-22-40W-L-HY	2x2	(30W 35W 40W)	120-277V	0.28A@120V, 0.12A@277V 0.32A@120V, 0.14A@277V 0.37A@120V, 0.16A@277V	3900 4550 5200	130 lm/W	(3500K, 4000K, 5000K)	0-10V	White	23.74"L x 23.74"W x 1.97"H	5.70 lbs
ETH-TTR-24-50W-L-HY	2x4	(30W 40W 50W)	120-277V	0.28A@120V, 0.12A@277V 0.37A@120V, 0.16A@277V 0.46A@120V, 0.20A@277V	3900 5200 6500	130 lm/W	(3500K, 4000K, 5000K)	0-10V	White	47.76"L x 23.74"W x 1.97"H	10.10 lbs

Sensor

SMART Smart Sensor for Daylight and Bi-Level Motion Dimming
(Blank) None

Emergency

EM 90 Minute Emergency Backup Battery LED Driver
(Blank) None


SHIPPING INFORMATION

Model	Unit Weight	Shipping Dimensions	Shipping Weight	Quantity /Box
2x2	5.70 lbs	24.13"L x 24.60"W x 8.66"D	13.60 lbs	4
2x4	10.10 lbs	48.15"L x 24.60"W x 8.66"D	23.10 lbs	4

PHYSICAL DIMENSIONS


2x2 Models

23.74"L x 23.74"W x 1.97"H




2x4 Models

47.76"L x 23.74"W x 1.97"H

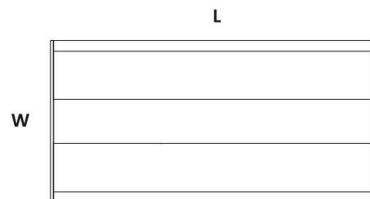

PHOTOMETRIC CHARACTERISTICS

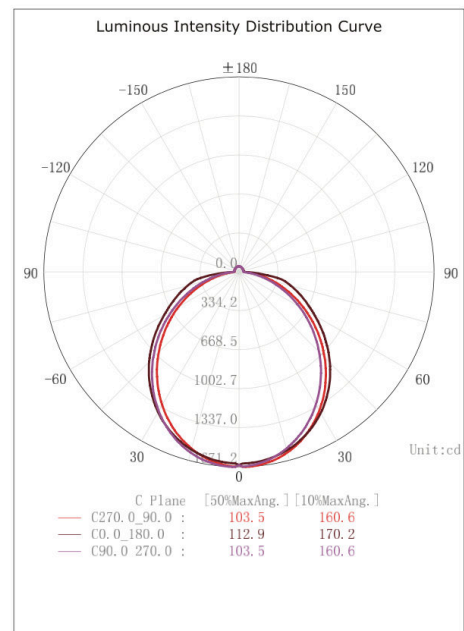

*Example of 2x2