JOB NAME: _____

TYPE: _____

PART #: _____

NOTES: _____

EUTDR

4" & 6" ULTRA-THIN DOWNLIGHT

STANDARD

FEATURES

- *Available in 3000k (warm white) and 4000k (neutral white) color temperatures **
- *Long-life LEDs provide at least 70% of initial lumen output (L_{70}) for 70,000 hours of operation ***
- *Color rendering index (R_a) > 80*
- *UTDR-4 provides 660 nominal lumens from 9 watts and UTDR-6 provides 860 nominal lumens from 12 watts*
- *Input voltage = 120V 60Hz*
- *Power factor > 0.90*
- *Total harmonic distortion < 20%*
- *Triac dimming*
- *Steel housing, painted white. Polystyrene lens*
- *Easy installation in new construction or retrofit applications*
- *Compatible with 4" (EUTDR-4) and 6" (EUTDR-6) ceiling cut-outs*
- *Type IC, inherently protected. Access above ceiling required*
- *This device is not intended for use with emergency exits*

WARRANTY & LISTINGS

- *cETLus listed for damp locations*
- *Compatible for new construction and retrofit applications*
- *Flicker-free per IEEE1789-2015 (no observable adverse effects of flicker at 100% light output level)*
- *Complies with FCC Part 15, class B*
- *Surge protection = 2.5kV*
- *5-year warranty of all electronics and housing*

* *Contact factory for other color temperatures and lumen packages*

** *L_{70} hours are IES TM-21-11 calculated hours*

COMPATIBLE DIMMERS

MANUFACTURER & SERIES	PART NUMBER
Lutron Maestro C-L	MACL-153MR
Lutron Skylark C-L	SCL-153P
Leviton Sureslide	6674
Lutron	PD-6WCL
Legrand Harmony	HCL453PTCCCV6
Lutron Diva	DV600P
Lutron	PD-6WCL

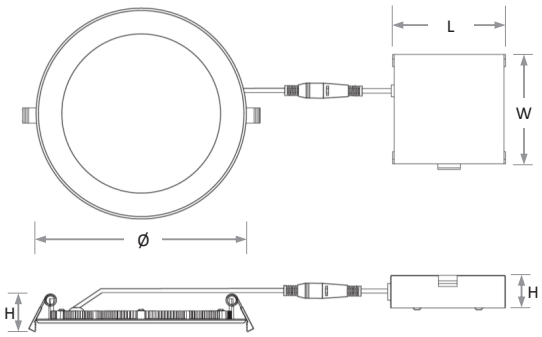

	Luminaire		Driver			
Model	Diameter	Height	Length	Width	Height	Weight
UTDR-4	4.7"	0.8"	3.5"	3.5"	1.4"	0.8 lbs
UTDR-6	6.9"	0.8"	3.5"	3.5"	1.4"	1 lbs

ORDERING INFORMATION

Series	Size & Nominal Lumen Output		Color Temperature	
EUTDR				
EUTDR	4-7L	700 lumens	3K	3000k
	6-9L	900 lumens	4K	4000k

OFFICE: 215-512-7000 | FAX: 267-288-5604
www.envoylighting.com

Specifications subject to change without prior notice. ©2021 Envoy Lighting, Inc. ALL RIGHTS RESERVED.

08/2021