

Job Name: _____
 Type: _____
 Part #: _____
 Notes: _____

EEM6WL-WP-PLED

MR-16 WET LOCATION SEMI-RECESSED POLYCARBONATE EMERGENCY UNIT

STANDARD		OPTIONAL				



ILLUMINATION

- Two fully adjustable, semi-recessed ultra bright, 5 watt MR-16 LED lamp heads standard.
- PLED: 5.0W high performance MR-16 base LED lamps for premium center-to-center spacing.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V maintenance-free, rechargeable sealed lead acid battery.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Universal knockout pattern on back plate for wall mount. Snaps into place making internal electrical connections.

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in gray or black finish.
- Fully gasketed clear polycarbonate cover offers protection against wet, non-hazardous dust, corrosive atmospheres and to water spray or splashing water locations.


WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for two years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for wet locations (20°C – 40°C).

OPTIONS

- CW: Optional internal heater and battery blanket for extreme cold temperature applications, (-25°C – 50°C MR-16 halogen)(-25°C – 40°C LED).

DIMENSIONS

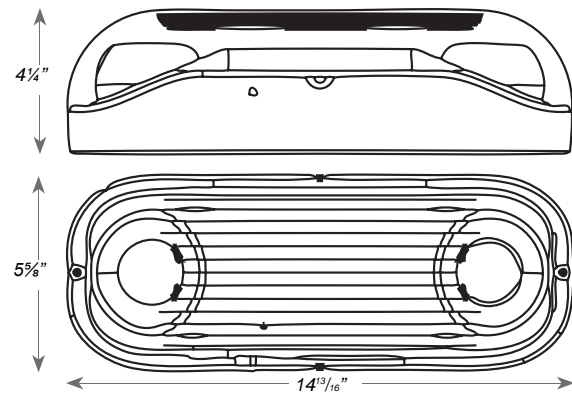

ORDERING INFORMATION

PRODUCT NUMBER EEM6WL

HC:

Options:

MODEL	HOUSING COLOR	Wet Location	PLED	5.0W High Lumen White LED Lamps	CW	CEC	OPTIONS
EEM6WL	(blank) B Black	WP					Internal Heater With Battery Blanket Title 20 Compliant

¹ Not available with SDT option.