

## ETH-TCP | LEDCanopy Light

The LED Canopy Light, Select  
 (3-Wattages + 3-CCT), 130lm/W, Wet Location  
 Rated, Dimmable + Smart Ready

Shown with Smart Sensor

### FEATURES

|                      |                              |
|----------------------|------------------------------|
| <b>Lumen Output</b>  | 5200 to 10400 lumens         |
| <b>Efficacy</b>      | 130 lm/W                     |
| <b>Input Voltage</b> | 120-277V                     |
| <b>Dimmable</b>      | 0-10V Continuous             |
| <b>CCT</b>           | Select (3500K, 4000K, 5000K) |
| <b>Rating</b>        | Wet Location                 |
| <b>Warranty</b>      | 5 Years                      |



### APPLICATIONS

Premium outdoor luminaire for surface mounting in ceiling spaces less than 25 feet. Suitable for general storage, cold storage, parking garages, and canopies.

### CONSTRUCTION

Manufactured for weather-proof durability using solid heavy duty die cast aluminum housing with anti-UV polyester coating to resist water, salt, corrosion, discoloration, and scratching. Wet Location rated.

### ELECTRICAL

Input voltages 120-277V with 0-10V Continuous Dimming. Tunable 3-CCT (3500K, 4000K, 5000K) and Tunable 3-Wattage. Operating temperatures -40°F to 104°F (-40°C to 40°C).

### MOUNTING

Surface mounted installation.

### OPTICS

Anti-UV Frosted Polycarbonate Lens.

### CONTROLS

PIR Photocell, Bi-Level Dimming, and Motion Detection programmable twist-lock cap with Remote Control. Shorting Cap for manual switch or timer control.

### LISTINGS

DLC Premium listed. UL certified to meet US and Canadian standards. FCC and RoHS compliant.

### WARRANTY



5 year exclusive limited warranty.

### TUNABLE CORRELATED COLOR TEMPERATURES (CCT)

3500K

4000K

5000K



## SPECIFICATIONS

### ENERGY DATA

**Input Voltage:** 120-277V  
**Input Frequency:** 50/60 Hz  
**Wattage:** Select (40W, 60W, 80W)  
**Power Factor:** >0.9  
**Operating Temperature:** -40°F to 104°F (-40°C to 40°C)

### LIGHTING DATA

**Lumens:** Select (5200, 7800, 10400)  
**Lumens Per Watt:** 130 lm/W  
**Color Correlated Temperature (CCT):** Select (3500K, 4000K, 5000K)  
**Dimmable:** 0-10V  
**Color Rendering Index (CRI):** >80  
**L70:** >50000 hours

## ORDERING INFORMATION

| Model       | Wattage | Voltage  | Current                | Lumens | Efficacy | CCT                   | Dimming | Color       | Dimensions                 | Weight    |
|-------------|---------|----------|------------------------|--------|----------|-----------------------|---------|-------------|----------------------------|-----------|
| ETH-TCP-80W | 40W     | 120-277V | 0.44A@120V, 0.16A@277V | 5200   | 130 lm/W | (3500K, 4000K, 5000K) | 0-10V   | Dark Bronze | 10.06"L x 10.06"W x 2.73"H | 20.28 lbs |
|             | 60W     |          | 0.66A@120V, 0.24A@277V | 7800   |          |                       |         |             |                            |           |
|             | 80W     |          | 0.88A@120V, 0.32A@277V | 10400  |          |                       |         |             |                            |           |

| Sensor   | Accessory   |
|--|---|
| <b>HAISEN-CP-BI</b> Photocell + Bi-Level Dimming Motion Sensor | <b>HD05R</b> Remote Control To Program Smart Sensor |
| <b>SC</b> Shorting Cap   | <b>(Blank)</b> None                                 |
|  | <b>EM</b> EM Battery                                |


## ORDERING GUIDE

| ETH | TCP   | 80W         | HAISEN-CP-BI | HD05R     |
|-----|-------|-------------|--------------|-----------|
| ETH | Group | Max Wattage | Sensor       | Accessory |

## PHYSICAL DIMENSIONS

### 80W Max Model

10.06"L x 10.06"W x 2.73"H

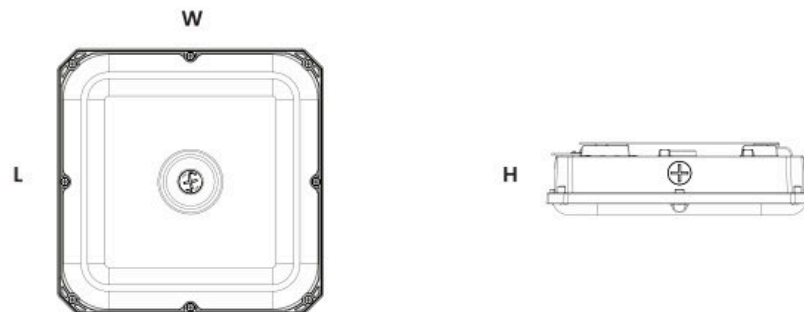

## SHIPPING INFORMATION

| Model         | Unit Weight | Shipping Dimensions         | Shipping Weight | Quantity /Box |
|---------------|-------------|-----------------------------|-----------------|---------------|
| 80W Max Model | 20.28 lbs   | 12.24"L x 12.24"W x 17.17"H | 22.93 lbs       | 4             |