

## EGP4

3-Wattages + 3-CCT (35/40/50K), Wet Rated, 130 lm/W, Dimmable + Smart

### FEATURES

Lumen Output	5200 to 1300 lumens
Efficacy	130 lm/W
Input Voltage	120-277V
Dimmable	0-10V Continuous
CCT	Select (3500K, 4000K, 5000K)
Rating	Wet Location
Warranty	5 Years

**APPLICATIONS:** Premium outdoor luminaire for surface mounting in ceiling spaces less than 25 feet. Suitable for general storage, cold storage, parking garages, and canopies.

**CONSTRUCTION:** Manufactured for weather-proof durability using solid heavy duty die cast aluminum housing with anti-UV polyester coating to resist water, salt, corrosion, discoloration, and scratching. Wet Location rated.

**ELECTRICAL:** Input voltages 120-277V with 0-10V Continuous Dimming. Tunable 3-CCT (3500K, 4000K, 5000K) and Tunable 3-Wattage. Operating temperatures -40°F to 104°F (-40°C to 40°C).

**MOUNTING:** Surface mounted installation.

**OPTICS:** Anti-UV Frosted Prismatic Polycarbonate Lens.

**CONTROLS:** Installed fixture mounted PIR or Microwave Sensor with Daylight Priority. Remote Control or Bluetooth App Control options available.

**EMERGENCY:** Installed 90 Minute Emergency Backup Battery Driver options available.

**LISTINGS:** DLC Premium listed. UL certified to meet US and Canadian standards. FCC and RoHS compliant.


**WARRANTY:** 5 year exclusive limited warranty.



Tunable 80W Max and 100W Max Models

### DIMENSIONS

10.06"L x 10.06"W x 2.73"H

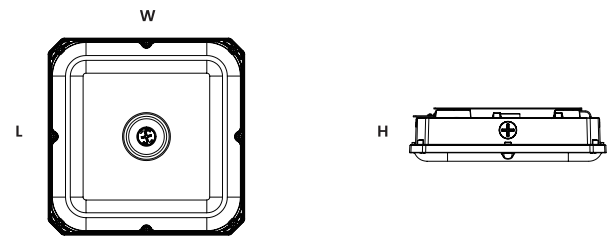

PIR Sensor or Bluetooth



Microwave Sensor or Bluetooth



Remote Control



Emergency Driver



### ORDERING INFORMATION

Model	Wattage	Voltage	Current	Lumens	Efficacy	CCT	Dimming	Color	Dimensions
EGP04-100/80/60W-H-TCP	(60W 80W 100W)	120-277V	0.55A@120V, 0.24A@277V 0.73A@120V, 0.32A@277V 0.92A@120V, 0.40A@277V	7800 10400 13000	130 lm/W	(3500K, 4000K, 5000K)	0-10V	Bronze	10.06"L x 10.06"W x 2.73"H

#### Control

**HD09VR-PH** 12V DC PIR Bi-Level Daylight High Bay 3-Pin Smart Sensor with Rotator Switches  
**HD09VR-MH** 12V DC MW Bi-Level Daylight High Bay 3-Pin Smart Sensor with Rotator Switches  
**HD07VR-MH** 12V DC MW Bi-Level Daylight High Bay 3-Pin Smart Sensor  
**HD07VR-MHB** 12V DC MW Bi-Level Daylight High Bay 3-Pin Smart Sensor for Haisen Blue App  
**HD07VR-PH** 12V DC PIR Bi-Level Daylight High Bay 3-Pin Smart Sensor  
**HD07VR-PHB** 12V DC PIR Bi-Level Daylight High Bay 3-Pin Smart Sensor for Haisen Blue App  
**HD06R** Sensor Remote Control with LCD Display (HD Series)


#### Emergency

**EM8 (BLD-CM20H-1500400)**

[INSTALLED] Emergency Backup LED Driver, 8W, 90-Min Battery

#### TUNABLE CORRELATED COLOR TEMPERATURES (CCT)

3500K 4000K 5000K



## SPECIFICATIONS

### ENERGY DATA

**Input Voltage:** 120-277V

**Input Frequency:** 50/60 Hz

**Wattage:** 3-Wattages (80W Max, 100W Max)

**Power Factor:** >0.9

**Total Harmonic Distortion (THD):** <10%

**Operating Temperature:** -4°F to 104°F (-20°C to 40°C)

### LIGHTING DATA

**Lumens:** 5200 to 13000

**Lumens Per Watt:** 130 lm/W

**Correlated Color Temperature (CCT):** 3-CCT (35K, 40K, 50K) **Dimmable:** 0-10V

**Color Rendering Index (CRI):** >80

**L70:** 50000 hours